

QuickStart Guide

FortiGate 80F Series

Before you begin

Register your device to access FortiGuard updates, cloud management, firmware upgrades, technical support and warranty coverage.

<http://support.fortinet.com>

FortiExplorer App

Rapidly provision, deploy, and monitor Security Fabric components including FortiGate and FortiWiFi devices from your mobile. Download now for free.



Scan the QR Code or visit:

<https://links.fortinet.com/fortiexplorer/downloads>



This document is prepared in English and French. In case of conflict between them, the English version shall prevail over the French version.

This guide covers: FG-80F, FG-81F, FG-80F-Bypass, FG-80F-POE, FG-81F-POE

December 7, 2021

Copyright© 2021 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., in the U.S. and other jurisdictions, and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. In no event does Fortinet make any commitment related to future deliverables, features or development, and circumstances may change such that any forward-looking statements herein are not accurate. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.

For Product License Agreement / EULA and Warranty Terms, visit <https://www.fortinet.com/content/dam/fortinet/assets/legal/EULA.pdf>

The Essentials

Default Logins



<https://192.168.1.99>

Username: **admin**

Password: **leave blank**

Admin Guide

For a detailed Getting Started guide, setup and configuration information, refer to the Admin Guide on <https://docs.fortinet.com/>

Customer Service

For contracts, licensing, product registration and account management, contact FortiCare Support at <https://www.fortinet.com/support/contact>

Self-service Resources

Access our knowledge base, forums, videos and technical experts at <https://www.fortinet.com/support/support-services/forticare-support>

Thank you for choosing Fortinet

Package Contents

FortiGate 80F Series

FG-80F, FG-81F, FG-80F-BYPASS, FG-80F-POE, and FG-81F-POE



FortiGate Device



QuickStart Guide



1x DC Power Adapter



1x Power Cable



1x Ethernet Cable

Quick Setup

Unpack the box, power the device, plug the Ethernet cable from a WAN port to the Internet and launch FortiExplorer using one of the following:

BLE Auto Detection

- 1 Enable **Bluetooth** on your Fortinet device and your mobile, then place them near each other
- 2 FortiExplorer will **automatically detect** your device
- 3 Follow the **on-screen instructions** to complete your setup

-or-

USB Connectivity

- 1 Connect your mobile to your Fortinet device with a **USB cable**
- 2 If the device is not detected, navigate to **My Fabric**, tap **Add** and follow the FortiExplorer's on-screen instructions

-or-

FortiGate Cloud Key Registration


- 1 Navigate to **My Fabric**, then tap **Add**
- 2 Scan the **FortiGate Cloud Key** located on your Fortinet device
- 3 Follow the **on-screen instructions** to complete your setup

Note: FortiExplorer can manage FortiGates without WiFi capabilities once they have been provisioned to allow HTTP/S admin access

Additional Setup Options


Set up your Fortinet device locally or connect using forticloud.com

GUI

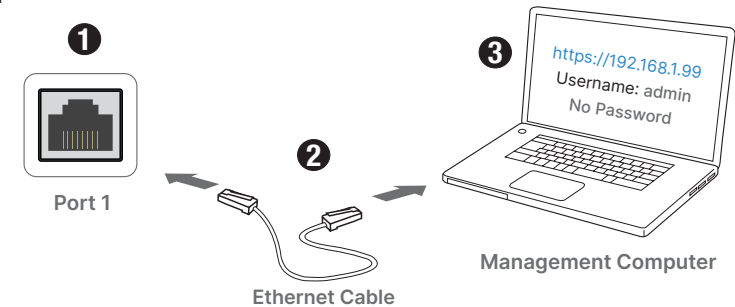

Note: For static IP configuration, use 192.168.1.1 with subnet mask 255.255.255.0

CLI

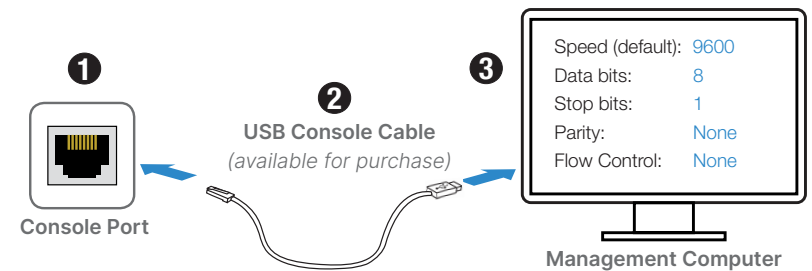


Note: For a detailed CLI guide, visit docs.fortinet.com

FortiGate Cloud Key (Connect a WAN port to the Internet)

- 1 Go to forticloud.com and login with your **FortiCloud Credentials** or **Register**
- 2 Follow the on-screen instructions, then click **Add FortiGate**
- 3 Enter the **FortiGate Cloud Key** located on the sticker of your device

Front - FG 80F Series

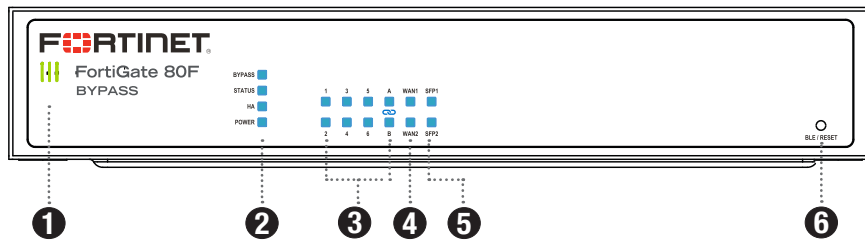

1 LOGO

||| FortiGate

■ **Green:** The device is on

■ **Off:** The device is off

2 BYPASS

(FG 80F-Bypass model only)

■ **Amber:** Bypass Port Pair is active (WAN1 & Port1, default configuration)

■ **Off:** Bypass Port Pair is off

STATUS

■ **Green:** Operating normally; BLE is off

⚡ **Flashing Green:** Booting up

⚡ **Flashing Amber:** BLE is on

HA

■ **Green:** Operating in an HA cluster

■ **Amber:** HA failover

■ **Off:** Not in an HA cluster

POWER

■ **Green:** Both power supplies are functioning

■ **Amber:** One power supply is functioning

■ **Off:** Power is off

3 PORT LINK/ACT

⚡ **Flashing Green:** 1000M/100M/10M data activity

■ **Off:** No link established

4 WAN

(WAN & SFP are Shared Ports)

⚡ **Flashing Green:** 1000M/100M/10M data activity

■ **Off:** No link established

5 SFP


⚡ **Flashing Green:** 1000M/100M/10M data activity

■ **Off:** No link established

6 BLE/RESET

Activates BLE management or restores to factory default

Back - FG 80F Series

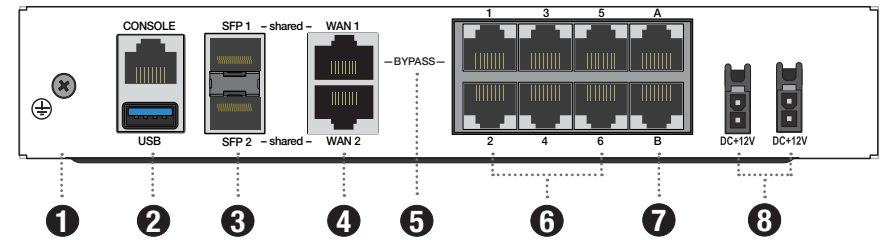

1 **Grounding Screw** additional protective earth connection, reserved for applications where a permanent local connection of protective earth is required

2 **Console (RJ-45)** CLI management computer interface

USB (USB A) USB 3.0 server port

3 **SFP Shared Ports 1 & 2 (SFP)** 1 Gbps SFP interface

4 **WAN Shared Ports 1 & 2 (RJ45)** 1 Gbps Ethernet interface


5 **BYPASS Port Pair (RJ45)** 1 Gbps Ethernet interface
(FG 80F-Bypass model only. WAN1 & Port1 are the default configuration)

6 **Ports 1 to 6 (RJ-45)** 1 Gbps Ethernet interface

7 **FortiLink Ports A & B (RJ-45)** 1 Gbps Ethernet interface


8 **Power Input** 12V DC 3A, 100-240V AC 50/60Hz
(optional redundant power adapter and cable available for purchase)

Front - FG 80F-POE Series

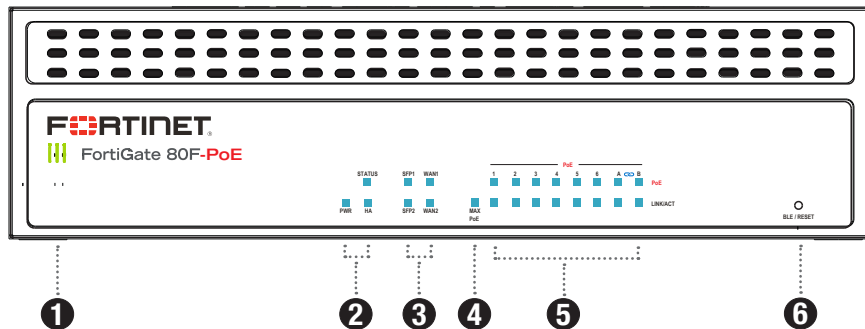

- 1 LOGO** **FortiGate**
- 2 PWR** **Green:** The device is on
Off: The device is off
- STATUS** **Green:** Operating normally; BLE is off
Flashing Green: Booting up
Flashing Amber: BLE is on
- HA** **Green:** Operating in an HA cluster
Amber: HA failover
Off: Not in an HA cluster
- 3 SFP/WAN** **Flashing Green:** 1000M/100M/10M data activity
(WAN & SFP are Shared Ports) **Off:** No link established
- 4 MAX PoE** **Red:** Providing Max PoE Power, 96W
Off: PoE power available
- 5 Ports** **Green:** PoE power on
PoE **Off:** PoE power off
- LINK/ACT** **Flashing Green:** 1000M/100M/10M data activity
Off: No link established
- BLE/RESET** Activates BLE management or restores to factory default

Back - FG 80F-POE Series

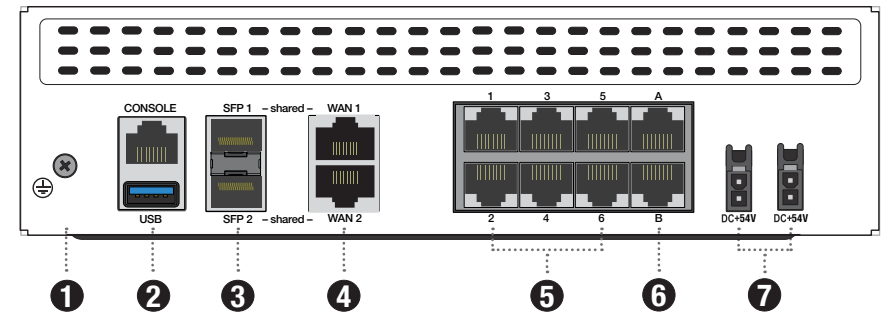

- 1 Grounding Screw** additional protective earth connection, reserved for applications where a permanent local connection of protective earth is required
- 2 Console (RJ-45)** CLI management computer interface
USB (USB A) USB 3.0 server port
- 3 SFP Shared Ports 1 & 2 (SFP)** 1 Gbps SFP interface
- 4 WAN Shared Ports 1 & 2 (RJ45)** 1 Gbps Ethernet interface
- 5 Ports 1 to 6 (RJ-45)** 1 Gbps Ethernet interface
- 6 FortiLink Ports A & B (RJ-45)** 1 Gbps Ethernet interface
- 7 Power Input** 54V DC 2.78A, 100-240V AC 50/60Hz
(optional redundant power adapter and cable available for purchase)

This page is intentionally left blank

Cette page a été laissée blanche intentionnellement

Guide de démarrage rapide

Série FortiGate 80F

Avant de commencer

Enregistrez votre appareil pour avoir accès aux mises à jour, à la gestion infonuagique, aux mises à niveau de micrologiciel, au soutien technique et à la garantie de FortiGuard.

<http://support.fortinet.com>

FortiExplorer App

Configurez, installez et surveillez rapidement les éléments de votre Security Fabric, dont les appareils FortiGate et FortiWiFi, à partir de votre appareil mobile. Téléchargez l'application gratuite maintenant.



Balayez le code QR ou rendez-vous au:
<https://links.fortinet.com/fortiexplorer/downloads>



Ce document est préparé en versions anglaise et française. En cas de conflit entre eux, la version anglaise prévaudra sur la version française.

Dans ce guide: FG-80F, FG-81F, FG-80F-Bypass, FG-80F-POE et FG-81F-POE

December 7, 2021

Copyright© 2021 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., in the U.S. and other jurisdictions, and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. In no event does Fortinet make any commitment related to future deliverables, features or development, and circumstances may change such that any forward-looking statements herein are not accurate. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.

Contrat de licence de produit / CLUF et modalités de garantie: <https://www.fortinet.com/content/dam/fortinet/assets/legal/EULA.pdf>

Renseignements de base

Identifiants par défaut



<https://192.168.1.99>

Username: **admin**

Password: **(sans mot de pass)**

Guide de gestion

Pour obtenir un guide de démarrage détaillé et des renseignements de configuration, consultez le guide de gestion sur <https://docs.fortinet.com/>

Service à la clientèle

Pour obtenir de l'aide avec les contrats, les licences, l'enregistrement de produit et la gestion de compte, communiquez avec le service FortiCare au <https://www.fortinet.com/support/contact>

Ressources en libre-service

Pour accéder à notre base de connaissances, à nos forums, à nos vidéos et à nos conseils techniques d'experts, visitez le lien <https://www.fortinet.com/support/support-services/forticare-support>

Merci d'avoir choisi Fortinet

Contenu de l'emballage

Série FortiGate 80F

FG-80F, FG-81F, FG-80F-BYPASS, FG-80F-POE, and FG-81F-POE



Appareil FortiGate



Guide de démarrage rapide



1 adaptateur d'alimentation CC



1 câble d'alimentation



1 câble Ethernet

Démarrage rapide

Sortez tout le contenu de la boîte, allumez l'appareil, connectez l'appareil à Internet en branchant le câble Ethernet sur un port WAN, et lancez FortiExplorer avec l'une des méthodes suivantes:

Détection automatique BLE

- 1 Activez les fonctions **Bluetooth** de l'appareil Fortinet et de votre appareil mobile, puis placez ceux-ci côte à côte
- 2 FortiExplorer **détectera automatiquement** l'appareil
- 3 Suivez les **instructions à l'écran** pour terminer la configuration

-ou-

Connectivité USB

- 1 Connectez votre appareil mobile et l'appareil Fortinet avec un câble USB
- 2 Si l'appareil n'est pas détecté, rendez-vous dans **My Fabric**, appuyez sur **Add** et suivez les instructions à l'écran dans FortiExplorer

-ou-

Enregistrement de la clé infonuagique FortiGate


- 1 Rendez-vous dans **My Fabric**, puis appuyez sur **Add**
- 2 Scannez la **clé infonuagique FortiGate**, sur l'appareil Fortinet
- 3 Suivez les **instructions à l'écran** pour terminer la configuration

N.B.: FortiExplorer peut gérer FortiGate sans fonctions Wi-Fi une fois que l'accès d'administrateur par protocole HTTP/S est autorisé.

Autres options de configuration


Configurez l'appareil Fortinet localement ou connectez-le avec forticloud.com

GUI

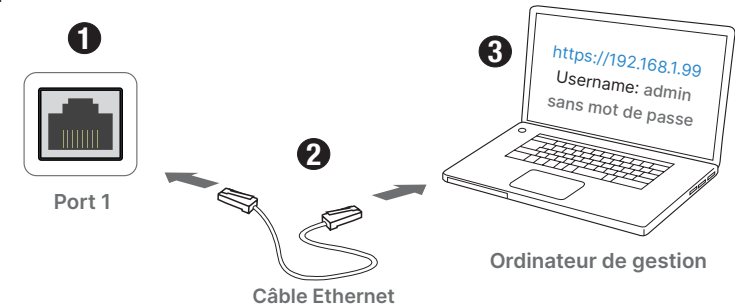

N.B.: Pour la configuration avec adresse IP fixe, utilisez l'adresse 192.168.1.1 et le masque de sous-réseau 255.255.255.0.

CLI

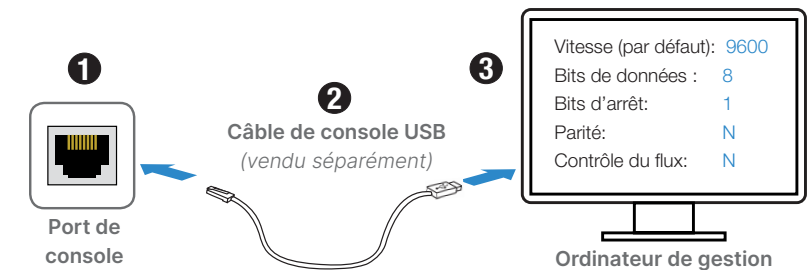


N.B.: Pour obtenir un guide détaillé pour l'interface de ligne de commande, rendez-vous sur docs.fortinet.com

Clé infonuagique FortiGate (Connexion à Internet avec un port WAN)

- 1 Rendez-vous sur forticloud.com et connectez-vous avec vos **identifiants FortiCloud** ou inscrivez-vous
- 2 Suivez les instructions à l'écran, puis cliquez sur **Add FortiGate**
- 3 Entrez la **clé infonuagique FortiGate** inscrite sur l'étiquette de l'appareil

Avant – Série FortiGate 80F

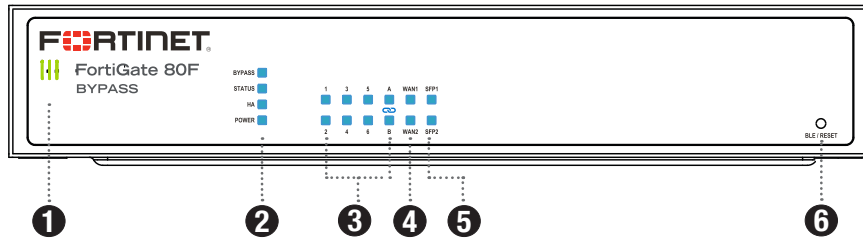

1 LOGO

||| FortiGate

■ **Vert**: L'appareil est allumé

■ **Éteint**: L'appareil est éteint

2 BYPASS

(Modèle FortiGate-80F-BYPASS seulement)

■ **Orange**: Couplage de ports BYPASS activé

■ **Éteint**: Couplage de ports BYPASS désactivé (WAN1 et Port 1: configuration par défaut)

STATUS

■ **Vert**: Fonctionnement normal, BLE désactivé

⚡ **Vert clignotant**: Démarrage

⚡ **Orange clignotant**: BLE activé

HA

■ **Vert**: Fonctionnement en grappe à haute disponibilité

■ **Orange**: Basculement vers la haute disponibilité

■ **Éteint**: Pas de grappe à haute disponibilité

POWER

■ **Vert**: Deux sources d'alimentation fonctionnelles

■ **Orange**: Une source d'alimentation fonctionnelle

■ **Éteint**: Aucune alimentation

3 PORT LINK/ACT

⚡ **Vert clignotant**: Activité de données 1000M/100M/10M

■ **Éteint**: Aucun lien établi

4 WAN

(Les ports WAN et SFP sont partagés)

⚡ **Vert clignotant**: Activité de données 1000M/100M/10M

■ **Éteint**: Aucun lien établi

5 SFP


⚡ **Vert clignotant**: Activité de données 1000M/100M/10M

■ **Éteint**: Aucun lien établi

6 BLE/RESET

Activation de la gestion BLE ou restauration des réglages par défaut

Arrière – Série FortiGate 80F

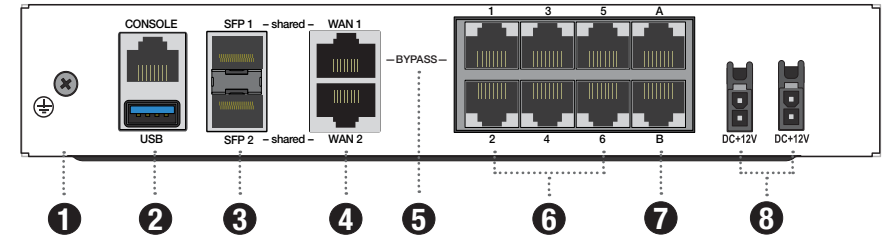

1 Vis de mise à la terre: Protection supplémentaire, réservée pour les applications où une connexion locale permanente de mise à la terre est requise

2 Console (RJ45) Ordinateur de gestion de l'interface de ligne de commande
USB (USB A) Port de serveur USB 3.0

3 Ports SFP partagés 1 et 2 (SFP) Interface SFP 1 Gb/s

4 Ports WAN partagés 1 et 2 (RJ45) Interface Ethernet 1 Gb/s


5 Couplage de ports BYPASS (RJ45) Interface Ethernet 1 Gb/s
(Modèle FortiGate-80F-BYPASS seulement. Configuration par défaut avec WAN1 et port 1)

6 Ports 1 à 6 (RJ45) Interface Ethernet 1 Gb/s

7 FortiLink Ports A & B (RJ45) Interface Ethernet 1 Gb/s


8 Alimentation 12V CC 3A, 100-240V CA 50/60Hz
(Adaptateur d'alimentation redondante et câble optionnels vendus séparément)

Avant - Série FG 80F-POE

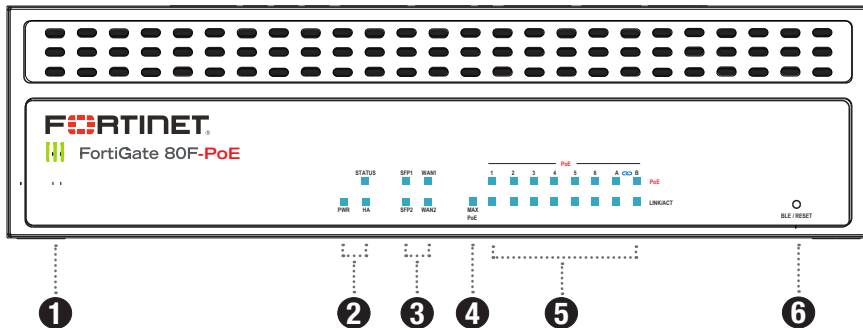

- 1 **LOGO**
 - FortiGate
 - Vert: L'appareil est allumé
 - Éteint: L'appareil est éteint
- 2 **PWR**
 - Vert: Deux sources d'alimentation fonctionnelles
 - Orange: Une source d'alimentation fonctionnelle
 - Éteint: Aucune alimentation
- STATUS**
 - Vert: Fonctionnement normal, BLE désactivé
 - Vert clignotant: Démarrage
 - Orange clignotant: BLE activé
- HA**
 - Vert: Fonctionnement en grappe à haute disponibilité
 - Orange: Basculement vers la haute disponibilité
 - Éteint: Pas de grappe à haute disponibilité
- 3 **SFP/WAN** (Les ports WAN et SFP sont partagés)
 - Vert clignotant: Activité de données 1000M/100M/10M
 - Éteint: Aucun lien établi
- 4 **MAX PoE**
 - Rouge: Alimentation par Ethernet maximale (96 W)
 - Éteint: Alimentation par Ethernet disponible
- 5 **Ports PoE**
 - Green: Alimentation par Ethernet activé
 - Éteint: Alimentation par Ethernet désactivée
- LINK/ACT**
 - Vert clignotant: Activité de données 1000M/100M/10M
 - Éteint: Aucun lien établi
- 6 **BLE/RESET** Activation de la gestion BLE ou restauration des réglages par défaut

Arrière - Série FG 80F-POE

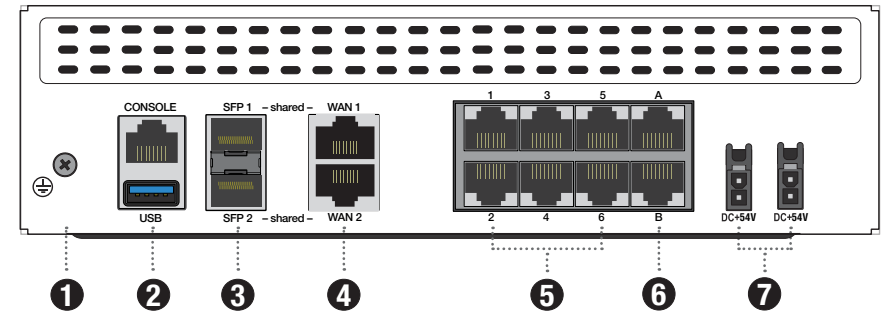

- 1 **Vis de mise à la terre** : Protection supplémentaire, réservée pour les applications où une connexion locale permanente de mise à la terre est requise
- 2 **Console (RJ45)** Ordinateur de gestion de l'interface de ligne de commande
USB (USB A) Port de serveur USB 3.0
- 3 **Ports SFP partagés 1 et 2 (SFP)** Interface SFP 1 Gb/s
- 4 **Ports WAN partagés 1 et 2 (RJ45)** Interface Ethernet 1 Gb/s
- 5 **Ports 1 à 6 (RJ45)** Interface Ethernet 1 Gb/s
- 6 **FortiLink Ports A & B (RJ45)** Interface Ethernet 1 Gb/s
- 7 **Alimentation** 54V CC 2.78A, 100-240V CA 50/60Hz
(Adaptateur d'alimentation redondante et câble optionnels vendus séparément)

Cautions and Warnings

Environmental specifications

Ambient operating temperature: 0°C to 40°C

Refer to specific Product Model Data Sheet for Environmental Specifications (Operating Temperature, Storage Temperature, Humidity, and Altitude)

Référez à la Fiche Technique de ce produit pour les caractéristiques environnementales (Température de fonctionnement, température de stockage, humidité et l'altitude).

Safety

Battery – Risk of explosion if the battery is replaced by an incorrect type. Do not dispose of batteries in a fire. They may explode. Dispose of used batteries according to your local regulations. IMPORTANT: Switzerland: Annex 4.10 of SRB14.013 applies to batteries.

Batterie – Risque d'explosion si la batterie est remplacée par un type incorrect. Ne jetez pas les batteries au feu. Ils peuvent exploser. Jetez les piles usagées conformément aux réglementations locales. IMPORTANT: Suisse: l'annexe 4.10 de SRB14.013 s'appliquent aux batteries.

警告
本電池如果更換不正確會有爆炸的危險
請依製造商說明書處理用過之電池

CAUTION:
There is a danger of explosion if a battery is incorrect replaced. Replace only with the same or equivalent type.
Dispose batteries of according to the manufacturer's instructions.
Disposing a battery into fire, a hot oven, mechanically crushing, or cutting it can result in an explosion.
Leaving a battery in an extremely hot environment can result in leakage of flammable liquid, gas, or an explosion.
If a battery is subjected to extremely low air pressure, it may result in leakage of flammable liquid, gas, or an explosion.

WARNING:
Lithium-Batterie Achtung: Explosionsgefahr bei fehlerhafter Batteriewechsel. Ersetzen Sie nur den gleichen oder gleichwertigen Typ. Batterien gemäß den Anweisungen des Herstellers entsorgen.

Beseitigung einer BATTERIE in Feuer oder einen heißen Ofen oder mechanisches Zerkleinern oder Schneiden einer BATTERIE, die zu einer EXPLOSION führen kann

Verlassen einer BATTERIE in einer extrem hohen Umgebungstemperatur, die zu einer EXPLOSION oder zum Austreten von brennbarer Flüssigkeit oder Gas führen kann

Eine BATTERIE, die einem extrem niedrigen Luftdruck ausgesetzt ist, der zu einer EXPLOSION oder zum Austreten von brennbarer Flüssigkeit oder Gas führen kann.

CAUTION: Shock Hazard. Disconnect all power sources.
ATTENTION: Risque d'électrocution. Débranchez toutes les sources d'alimentation.

This product is intended to be supplied by a Listed pluggable A via Class I external power supply adapter by means of a power cord connected to a socket-outlet with earthing connection.

Ce produit est destiné à être alimenté par un adaptateur d'alimentation externe de classe I par l'intermédiaire d'un cordon d'alimentation enfichable de classe A qui doit être branché à une prise de courant avec terre.

Caution: This equipment is to be used in a Network Environment 0 per IEC/TR 62101. This product is connected only to PoE networks without routing to the outside plant.

Attention: Ce matériel doit être utilisé dans un Environment Réseau 0 par IEC/TR 62101. Ce produit est uniquement connecté aux réseaux PoE sans installation externe de routage.

Grounding — To prevent damage to your equipment, connections that enter from outside the building should pass through a lightning / surge protector, and be properly grounded. Use an electrostatic discharge workstation (ESD) and/or wear an anti-static wrist strap while you work. In addition to the grounding terminal of the plug, on the back panel, there is another, separate terminal for earthing.
Mise à la terre — Pour éviter d'endommager votre matériel, assurez-vous que les branchements qui entrent à partir de l'extérieur du bâtiment passent par un parafoudre / parasurtenseur et sont correctement mis à la terre. Utilisez un poste de travail de décharge électrostatique (ESD) et / ou portez un bracelet anti-statique lorsque vous travaillez. Ce produit possède une borne de mise à la terre qui est prévu à l'arrière du produit, à ceci s'ajoute la mise à la terre de la prise.

This product has a separate protective earthing terminal provided on the back of the product in addition to the grounding terminal of the attachment plug. This separate protective earthing terminal must be permanently connected to earth with a green with yellow stripe conductor minimum size #12AWG and the connection is to be installed by a qualified service personnel.
Ce produit a une borne de mise à la terre séparé sur le dos de l'appareil, en plus de la borne de mise à la terre de la fiche de raccordement. Cette borne de mise à la terre séparée doit être connecté en permanence à la terre avec un conducteur vert avec la taille bande jaune de minimum #12AWG et la connexion doit être installé par un personnel qualifié.

Regulatory Notices

Federal Communication Commission (FCC) – USA

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received; including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if it is not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
Reorient or relocate the receiving antenna.
Increase the separation between the equipment and receiver.
Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
Consult the dealer or an experienced radio/TV technician for help.

WARNING: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Industry Canada Equipment Standard for Digital Equipment (ICES) – Canada

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Innovation, Science and Economic Development (ISED) – Canada

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:
1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:
1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

The maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be This device and it's antennas(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with IC multi-transmitter product procedures.

Cet appareil et son antenne (s) ne doit pas être co-localisés ou fonctionner en association avec une autre antenne ou transmetteur.

Model: FG-80F, FG-81F, FG-80F-Bypass

Antenna	Qty	Antenna Type	Connector	Gain (dBi) 2.4GHz
BT (Internal)	1	PIFA	IPEX	1.3

IMPORTANT: The device must be professionally installed and must use the supplied antenna.

European Conformity (CE) - EU

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.



The product transmits within the frequency ranges and less than or equal to the power listed below:

2402-2480MHz less than 20dBm

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Simplified EU Declaration of Conformity

This declaration is only valid for Fortinet products (including combinations of software, firmware and hardware) provided by Fortinet or Fortinet's authorized partners to the end-customer directly for use within the EU or countries that have implemented the EU Directives and/or spectrum regulation. Any Fortinet products not obtained directly from Fortinet or Fortinet's authorized partners may not comply with EU Directives and Fortinet makes no assurances for such products.

Български

Този продукт е в съответствие с Директива 2014/53/ЕС.

Česky

Tento produkt je v souladu se směrnici 2014/53/EU.

Dansk

Dette produkt er i overensstemmelse med direktiv 2014/53/EU.

Deutsch

Dieses Produkt entspricht der Richtlinie 2014/53/EU.

Eesti

See toode vastab direktiivile 2014/53/EL.

English

This product is in compliance with Directive 2014/53/EU.

Español

Este producto cumple con la Directiva 2014/53/UE.

Ελληνική

Το προϊόν αυτό συμμορφώνεται με την Οδηγία 2014/53/ΕΕ.

Français

Ce produit est conforme à la Directive 2014/53/UE.

Hrvatski

Ovaj proizvod je u skladu s Direktivom 2014/53/EU.

Italiano

Questo prodotto è conforme alla Direttiva 2014/53/UE.

Latvian

Šis produkts atbilst Direktīvai 2014/53/EU.

Lietuvių

Šis gaminyas atitinka direktyvą 2014/53/ES.

Malti

Dan il-prodott huwa konformi mad-Direttiva 2014/53/UE.

Magyar

Ez a termék megfelel a 2014/53/EU irányelvnek.

Nederlands

Dit product is in overeenstemming met Richtlijn 2014/53/EU.

Norsk

Dette produktet er i samsvar med direktiv 2014/53/EU.

Polski

Ten produkt jest zgodny z dyrektywą 2014/53/UE.

Português

Este produto está em conformidade com a Diretiva 2014/53/UE.

Rumunski

Acest produs este în conformitate cu Directiva 2014/53/UE.

Slovensky

Tento produkt je v súlade so smernicou 2014/53/EÚ.

Slovensko

Ta izdelek je v skladu z Direktivo 2014/53/EU.

Suomi

Tämä tuote on direktiivin 2014/53/EU mukainen.

Svenska

Denna produkt överensstämmer med direktiv 2014/53/EU.

Note: The full Declaration of Conformity for this product is available in the link below:
<https://site.fortinet.com/ProductRegulatory/EU>

Voluntary Control Council for Interference (VCCI) – Japan

この装置は、クラスB機器です。この装置は、住宅環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。取扱説明書に従って正しい取り扱いを下さい。 V C C I - B

Product Safety Electrical Appliance & Material (PSE) – Japan

日本では電気用品安全法(PSE)の規定により、同梱している電源コードは本製品の専用電源コードとして利用し、他の製品に使用しないでください。

Bureau of Standards Metrology and Inspection (BSMI) – Taiwan

The presence conditions of the restricted substance (BSMI RoHS table) are available at the link below:
限用物質含有情况表 (RoHS Table) 請到以下 網址下載:
<https://www.fortinet.com/bsmi>

英屬蓋曼群島商防特網股份有限公司台灣分公司
地址：台北市內湖區行愛路176號2樓
電話：(02) 27961666

National Telecommunications Commission (NCC) – Taiwan

Model: FG-80F, FG-81F, FG-80F-Bypass, FG-80F-POE, FG-81F-POE
NCC警告
取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用 者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定位作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Model: FG-80F, FG-81F, FG-80F-Bypass Agência Nacional de Telecomunicações (ANATEL) – Brazil

Este produto não é apropriado para uso em ambientes domésticos, pois poderá causar interferências eletromagnéticas que obrigam o usuário a tomar medidas necessárias para minimizar estas interferências.*

Para maiores informações, consulte o site da ANATEL www.anatel.gov.br

Model: FG-80F, FG-81F, FG-80F-Bypass Korea Certification (KC) – Korea

A급 기기 (업무용 방송통신기자재)
이 기기는 업무용(A급) 전자파적합기기로서 판매자 또는 사용자는 이 점을 주의하시기을 바라며, 가정외의 지역에서 사용하는 것을 목적으로 합니다.

해당 무선설비기기는 운용중 전파혼신 가능성이 있으므로 인명안전과 관련된 서비스는 할 수 없습니다.
해당 무선설비기기는 운용중 전파혼신 가능성이 있음

UK Conformity Assessed (UKCA) – United Kingdom

The product transmits within the frequency ranges and less than or equal to the power listed below:
2402-2480MHz less than 20dBm

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This product is in compliance with Statutory Instrument 1206 Radio Equipment Regulations 2017

The full Declaration of Conformity for this product is available in the link below:
<https://site.fortinet.com/ProductRegulatory/UK>

